TD-402S

Desktop Shipping Label Printer



Clear Handwriting

Efficient Printing

Precise Recognition

Printer Specification

Printing Method: Direct Thermal	**Print Head Life:** 30km
Resolution: 203 dpi	**Interface:** USB, Optional: Bluetooth 5.2, WIFI 6
Printing Width: MAX108mm	**Consumables:** Gap paper, Continuous paper, Black label paper, Folding paper
Printing Speed: MAX 152mm/s	

Product Advantage

First back, refuse to waste

It has the first function to go back and accurately locate the label,Not a single tag is wasted.



High speed printing, high efficiency and durability

With a high speed print of 152 mm per second, 60 logistics transport labels can be printed in one minute. Imported print head with fast dissipation for supporting longer efficient printing.



Precise positioning, convenient printing

It has a lift sensor, a penetration sensor (paper spacing) and a reflection sensor (black line mark) to ensure that the paper printing position is more accurate.



Multilingual compatibility

Compatible with a variety of mainstream language character lists around the world, including Chinese/English/Japanese/ Russian/Korean character library, easy to use in different countries.



Professional Software

Support usb connected computer printing and Bluetooth connected mobile app printing

TPL Print

GET IT ON Google Play

Download on the App Store

Bluetooth Connection

WIFI Connection


USB Connection

Mac os


Windows

Linux


Application

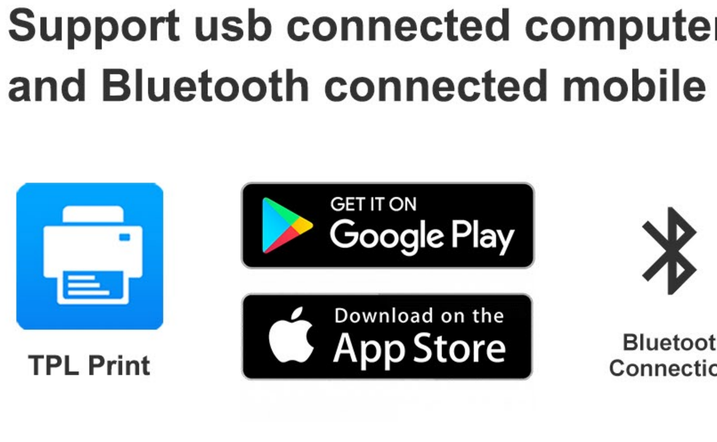

Supermarket

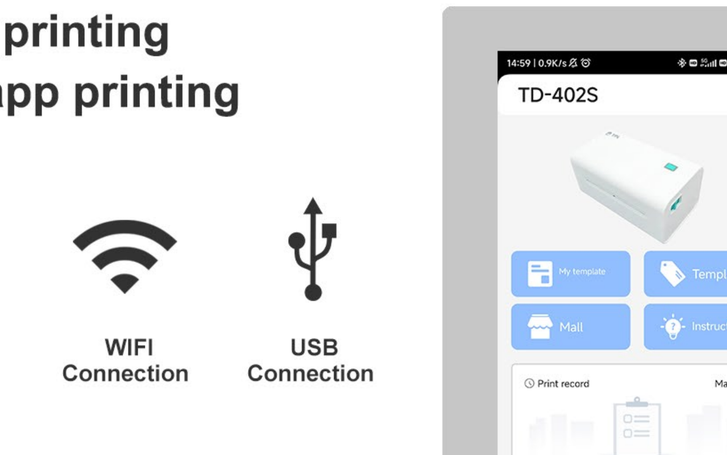

Warehouse

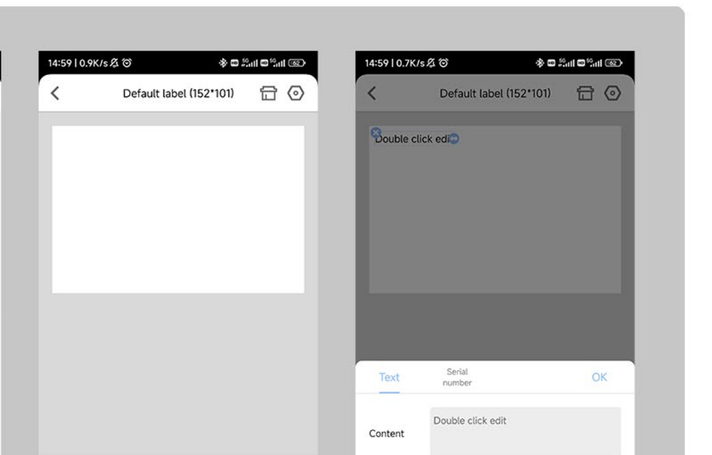

Logistics

No.3883 Zhuhai Avenue, Xiangzhou District, Zhuhai, Guangdong, P.R. China 519060

contact@ggimage.com

86 (0)756-6259539

www.tpl-label.com

Website Facebook LinkedIn X

TD-402S

Desktop Shipping Label Printer



Clear Handwriting **Efficient Printing** **Precise Recognition**

Application



Supermarket



Warehouse



Logistics

Printer Specification

Dimensions	length (175) * width (98.5) * height (90) mm
Weight	0.65 KG
Resolution	203DPI
Central processing unit	32-bit efficient processor
Maximum print speed	152mm/s
Maximum print width	108mm
Maximum print length	1778mm
Label type	Gap paper, continuous paper, black label paper, folding paper
Label width	30~114mm
Label thickness	0.12 ~ 0.26 mm
Communication interface	Standard: USB, Optional: USB+ Bluetooth (5.2) USB+WIFI 6 (2.4G/5G)
Instruction set	TSPL
Memory	8 MB
Flash memory	8 MB
Support system	Windows 7 and above, MAC 10.13 or later, Linux 18.04, 20.04, 22.04
Print head life	30km (printing rate 12.5%)
Power supply specification	Input: 100-240V 50/60Hz, Output: 24V-2.5A
Environment of use	Temperature: 5-40℃, humidity (non-condensation) 25~85%
Storage environment	Temperature: -10-60℃, humidity (non-condensation) : 10~90%
One dimensional code	Code128, EAN128, ITF, Code39, Code93, EAN13, EAN13+2, EAN13+5, EAN8, EAN8+2, EAN8+5, CodeBar, Postnet, UPC-A, UPC-A+2, UPC-A+5, UPC-E, UP C-E+2, UPC-E+5, MSI, MSIC, PLESSEY, CPOST, ITF14, EAN14, Code11
Two-dimensional code	QR code, PDF417, Micro PDF417, DataMatrix, AZTEC
Sensor	Gap sensor/open cover sensor/black label sensor
Character zoom/rotate	1-10x magnification /0°, 90°, 180°, 270° rotation/mirror printing
Image specification	/
Print rip paper method	Top tear paper
Paper out mode	Front out paper
Way of opening cover	Forward opening cover
Accessories	1. Power adapter 2. Power cord 3. USB cable 4. Quick Installation Guide
Accessories (optional)	External paper roll holder

No.3883 Zhuhai Avenue, Xiangzhou District, Zhuhai, Guangdong, P.R. China 519060

86 (0)756-6259539

contact@ggimage.com

www.tpl-label.com

Website Facebook LinkedIn X